# MATHEMATICAL CALCULATIONS IN INCREASING OIL FIELD PRODUCTION

**Abdurasulov AbduKhalil XXX**
*Karshi State Technical University*
**Bekjonov Rozisher Soatmurodovich**
*Karshi State Technical University*
**Nizomov Elbek Erkinovich**
*Karshi State Technical University*

**Abstract.** The authors consider such issues as the history of the development of waterflooding methods, various waterflooding systems and the conditions for their application, the density of the production well grid, the pressure drop between the injection line and the production zone, the approach to the development of water-oil zones, the sequence of commissioning injection wells, regulation and intensification of production, ways to improve the efficiency of developing multilayer objects. The article also analyzes the practical results and future prospects of waterflooding in the Fergana fields.

**Keywords.** Multilayer object, Production regulation,Oil field, Waterflooding, Development system, Oil recovery factor, Reservoir pressure, Well grid, Injection well

**Annotatsiya**. Mualliflar suv toshqini usullarining rivojlanish tarixi, turli xil suv toshqini tizimlari va ularni qo'llash shartlari, ishlab chiqarish quduqlari tarmog'ining zichligi, inyeksiya liniyasi va ishlab chiqarish zonasi orasidagi bosimning pasayishi, suv-neft zonalarini rivojlantirishga yondashuv, ishga tushirish ketma-ketligi kabi masalalarni ko'rib chiqadilar. inyeksiya quduqlari, ishlab chiqarishni tartibga solish va intensivlashtirish, ko'p qatlamli ob'ektlarni rivojlantirish samaradorligini oshirish yo'llari. Maqolada Farg'ona konlarida suv toshqinining amaliy natijalari va kelgusidagi istiqbollari ham tahlil qilingan.

**Kalit so'zlar**. Kalit so'zlar. Ko'p qatlamli ob'ekt, ishlab chiqarishni tartibga solish,neft koni, suv toshqini, rivojlanish tizimi, neftni qayta tiklash omili, rezervuar bosimi, quduq panjarasi, in'ektsiya qudug'i

**Аннотация**. Авторы рассматривают такие вопросы, как история развития методов затопления, различные системы затопления и условия их применения, плотность сети добывающих скважин, перепады давления между линией впрыска и добывающей зоной, подход к разработке водно-нефтяных зон, последовательность пусконаладочы рассматривают такие вопросы, как история развития методов затопления, различные системы затопления и условия их применения, плотность сети добывающих скважин, перепады давления между линией впрыска и добывающей зоной, подход к



ISSN 3030-3907

разработке водно-нефтяных зон, последовательность пусконаладочных работ. нагнетательные скважины, пути регулирования и интенсификации добычи, повышения эффективности освоения многослойных объектов. В статье также проанализированы практические результаты и перспективы затопления ферганских шахт.

**Ключевые слова.** Многослойный объект, Регулирование добычи, Нефтяное месторождение, Заводнение, Система разработки, Коэффициент извлечения нефти, Пластовое давление, Сетка скважин, Нагнетательная скважина

**Introduction.**

To ensure the well's pumping, the useful gas factor must be greater than or equal to the optimal specific gas consumption.

$$Г_{fgo} \geq R_{optimal} (1)$$

If the bottomhole pressure is less than the saturation pressure, the fountaining is observed through the following inequality

$$\left(Г - 10^3 \frac{\alpha}{\rho_n} \cdot \frac{P_{qat} + P_{kub}}{2}\right) \cdot \left(1 - \frac{n}{100}\right) \geq \frac{0{,}388H\left(H\rho_{suyuq.}g - P_{qat} + P_{kub}\right)}{d^{0{,}5}\left(P_{qat} - P_{to'y}\right)\lg\left(\frac{P_{qat}}{P_{to'y}}\right)} (2)$$

This is determined α as follows.

$$\alpha = \frac{Г\rho_{gn}}{P_{to'y} - 0{,}1 \cdot 10^6} (3)$$

If $P_{qat} \rangle P_{to'y}$ If so, then the condition for the fountain to appear is as follows.

$$\left(\frac{G - \frac{10^3 \cdot \alpha}{\rho_n}}{2}\right) \cdot \left(1 - \frac{n}{100}\right) \geq \frac{0{,}388H\left(H\rho_{suyuq.}g - P_{to'y} + P_{k.u.b}\right)}{d^{0{,}5}\left(P_{to'y} - P_{kub}\right)\lg\left(\frac{P_{to'y}}{P_{k.u.b}}\right)} (4)$$

where H is the length of the riser and is found as follows:

$$H = L - \left(P_{qat} - P_{to'y}\right) / \rho_{suyuq.} \cdot g (5)$$

The useful gas factor is determined as follows

$$G_{fgo} = \frac{G - \frac{P_{k.u.b} \cdot \alpha}{\rho_{gn}}}{2} \cdot \left(1 - \frac{n}{100}\right) (6)$$

As the formation pressure decreases, the length of the gas-liquid riser increases and is found by the expression. In this case, the gas consumption increases and becomes equal to the useful gas factor, so that the jetting stops. The maximum length of the gas-liquid riser is determined by solving the expression.



ISSN 3030-3907

$$H_{\max} = 0{,}5\left[h + \sqrt{h^2 + 10{,}31 G_{fgo} d^{0,5} h \lg\left(\frac{P_{to'y}}{P_{k.u.b}}\right)}\right] (7)$$

where h is the static height of the liquid and is defined as follows.

$$h = \frac{P_{to'y} - P_{k.u.b}}{\rho_{suyuq.} \cdot g} (8)$$

where is the average density of the liquid corresponding to the length of the gas-liquid riser, which is found as follows:

$$\rho_{suyuq.} = \rho_{o'r.n}\left(1 - \frac{n}{100}\right) + \rho_{q.s.}\frac{n}{100} (9)$$

$\rho_{o'r.n}$ - The average density of oil in a waterlogged well is determined as follows

$$\rho_{o'r.n} = \frac{\rho_{gn} + \rho_{qn}}{2}$$

Minimum bottom hole pressure for a fountain

$$P_{q.tubi.\min} = P_{to'y} + (L - H_{\max})\rho_{k.t.s.} g$$

The rational use of subsoil, natural resources, and minerals has always been one of the main requirements for the mining industry. Oil workers have done a lot to fulfill this requirement. The main role in solving these problems belongs to the further improvement of methods for developing oil fields based on the injection of water into oil reservoirs.

During this time, a huge amount of factual material has been collected, extensive experience in development using waterflooding has been accumulated, which requires critical analysis and generalization.

**Development of waterflooding methods.** Waterflooding was first applied in the Fergana oil fields in 1952, when pilot water injection was started into the peripheral part of the V+VI horizon reservoir of the Yuzhny Alamishik field. The positive effect of the pilot injection, expressed in a certain increase in the flow rate of wells in terms of oil and liquid, gave grounds to start industrial waterflooding of these horizons in 1953.

In 1954, waterflooding was started along the VIII horizon of the Khojaabad field and the VII horizon of the Yuzhny Alamishik field.

In the first years of the introduction of artificial waterflooding methods, the greatest preference was given to systems for injecting water into the peripheral parts of the reservoirs. However, the process of development and operation of these systems in Fergana faced serious difficulties, mainly due to the poor hydrodynamic connection between the peripheral and oil parts of the reservoir.

For this, as well as for a number of other objective reasons, by the beginning of 1960, peripheral waterflooding at many fields in Fergana began to be gradually



ISSN 3030-3907

supplemented or completely replaced by various intra-contour waterflooding systems. This made it possible to dramatically increase the efficiency of waterflooding and thereby gave grounds for its wider introduction at other Fergana facilities.

Artificial waterflooding methods were particularly intensively introduced at the Fergana fields in the period 1960-1968. During this period, industrial water injection was mastered at the Andijan (III horizon), Yuzhny Alamishik (KKS and III horizons), Khojaabad (III and VII horizons), Severny Sokh (VIII horizon), Chongara-Galcha (IV horizon), Maili-Su-IV (V and VII horizons), Izbaskent (V and IX horizons) and a number of other fields.

By the end of 1968, 20 development facilities at eight fields were covered by peripheral, intra-contour and combined types of waterflooding only by the former Uzbekneft production association. The annual volume of water injection was more than 3.2 million m3. Along with the above listed traditional waterflooding systems, for the first time in the former USSR, such a combined method of impact was industrially mastered, in which peripheral waterflooding of the reservoir and the transfer of high-pressure gas to its arch part were simultaneously carried out. This method of influence was used in the development of the VIII horizon of the Severny Sokh field and the IV horizon of the Chongara-Galcha field (Galcha area).

Waterflooding and high-pressure gas transfer allowed the Uzbekneft association to produce an additional 200,000 tons of oil in 1968 alone.

Artificial waterflooding was also effectively carried out at the fields of the former Kyrgyzneft association, where by this time ten out of 13 developed oil reservoirs were covered by waterflooding.

A great deal of work on the introduction of waterflooding was carried out during this period by the teams of the Institute of Geology and Exploration of Oil and Gas Fields (IGEOF), the Department of Development and Operation of Oil and Gas Fields of the Tashkent Polytechnic Institute, the central research laboratories of the former Fergananeft, Andizhanneft oil field administrations and the Kyrgyzneft association.

A significant contribution to the solution of problems related to the development of waterflooding at the Fergana fields was made by the works of P.K.Azimov, G.A.Alijanov, A.D.Djumagulov, M.R.Ibragimov, A.M.Khutorov, S.N.Nazarov, A.R.Mukhiddinov, A.A.Tomchani, Kh.M.Turgunov, A.V.Mavlyanov and others. Many issues of waterflooding technology were solved by the engineering and technical workers of the fields, including V.P.Akulov,



ISSN 3030-3907

A.M.Akramov, Z.V.Lyashevich, A.Kh.Khojimatov, L.I.Kalandarov, N.R.Rakhimov, I.N.Khristenko and others.

In subsequent years, V.N.Charushnikov, F.T.Adylov and others carried out a great deal of work on summarizing the experience of developing and waterflooding the Fergana oil fields, and are currently being carried out by N.V.Sipachev, E.K.Irmatov, B.Sh.Akramov, A.G.Posevich, A.Kh.Agzamov, O.A.Kayumov and others [1, 2, 3, 4, 5].

Currently, almost all Fergana oil fields are in the late and final stages of development. Artificial waterflooding methods cover about 90% of the objects under development, from which more than 80% of the total annual oil production in Fergana is extracted.

The expected ultimate oil recovery factor for waterflooded facilities varies widely - from 25-40% to 60-70%, and sometimes even higher.

Thus, it can be concluded that almost all waterflooding systems known to date have been tested at the Fergana fields.

Waterflooding will remain the main method of development in the coming years.

**Ways to improve development systems.** The oil field being developed, especially a large one, is a very complex system. Its main elements are reserves with all the diversity of their natural physical and geological features and technical and technological means of development and impact, including production and injection wells, technical means for oil production and water injection, collection and treatment of all well products, and control means.

Obviously, the main condition for rational development is the correct combination of all these main elements of the system.

Recommendations for development that are not tied to specific geological and physical conditions become meaningless. The features of specific fields and reservoirs are extremely diverse, but the main, defining ones include the size of the field, specific reserves per unit area, type of reservoir, permeability, reservoir stratification, oil viscosity, pressure, and regime.

An important and to a certain extent generalizing indicator for sand reservoirs is the ratio of permeability to viscosity.

It is these features that we will use when considering ways to further improve waterflooding development methods.

Improving methods should ensure:

- increase in the rate of oil production from explored reserves with the general goal of meeting the needs of the national economy;



ISSN 3030-3907

• all-round increase in the final oil recovery, i.e. maximum use of natural resources;

• improving the economic efficiency of costs for the development of the oil production industry.

These are, of course, general and well-known provisions, but now it is worth recalling them, since we cannot be completely satisfied with the state and practical results of the application of waterflooding development methods [3, 6].

**On the density of production well grids.** This problem is one of the most difficult in the technology of oil field development. The complexity is due to the fact that, along with the grid density, the development indicators are also affected by the width of the strips, the distance of the first rows from the injection line, the pressure drop, etc. For a long time, in order to search for optimal solutions, grids were used in a wide range - mainly from 64 to 16 ha/well in fields with different characteristics and in different combinations with other development elements.

Grids of the order of 60-40 ha are accepted for reservoirs in terrigenous monolithic formations with very favorable geological and physical characteristics of reservoirs, as well as at great depths of formations, when drilling a large number of wells is economically inexpedient. In the latter case, rare grids must be combined with active impact on the reservoirs - with cutting into narrow strips or with the use of areal and selective waterflooding.

Grids of the order of 30-16 ha are used in the development of reservoirs characterized by average values of reservoir and fluid parameters and significant heterogeneity of reservoirs.

The densest grids - less than 16 ha/well - are used in the development of reservoirs with high oil viscosity, sharp heterogeneity of reservoirs, as well as reservoirs that require limiting fluid withdrawal from wells [5, 8].

The problem of choosing optimal well grids for certain conditions has not been solved.

**On the pressure drop between the injection line and the production zone.** Creating high pressure drops is one of the conditions for obtaining high development rates. In all possible cases, it is advisable to reduce the bottomhole pressure in production wells by 20-30% below the saturation pressure. It is also advisable to increase the pressure on the injection lines above the initial reservoir pressure, especially with reduced reservoir productivity. For low-permeability terrigenous formations, a water injection pressure of 150-180 kgf/cm² should be used.



ISSN 3030-3907

From the very beginning of the field operation, it is necessary to correctly justify the value of the injection pressure and build waterflooding facilities for this pressure, avoiding major reconstruction work.

Some caution in choosing the injection pressure is needed when developing reservoirs associated with carbonate reservoirs. Cases of very rapid waterflooding of wells have been noted due to the movement of water along fractures. Since carbonate reservoirs have a very diverse structure of the porous medium, the permissible injection pressure must be established for each specific reservoir based on the results of pilot-industrial water injection into wells that have undergone acid treatment.

**Approach to the development of water-oil zones.** In the first period of waterflooding application, it was assumed that water-oil zones may not be drilled and that peripheral waterflooding in all cases will ensure the displacement of oil to production wells drilled in the inner oil-bearing contour.

Without drilling or with drilling a relatively small number of wells, water-oil zones of those reservoirs can be developed, the characteristics of which allow efficient use of peripheral waterflooding. This also applies to deposits with an active natural water drive regime.

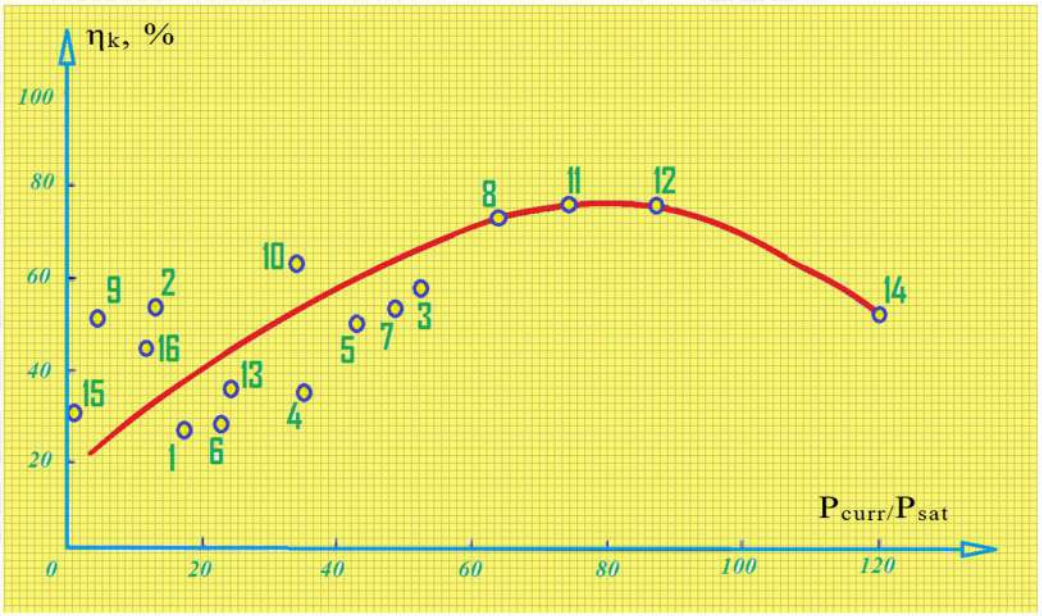



***Fig. 1. Dependence of $\eta_k$ on the current reservoir pressure at which waterflooding was started, expressed as a percentage of the pressure of oil saturation with gas: 1, 2, 3 - Khojaabad field (horizons III, VII, VIII); 4, 5, 6, 7 - Yuzhny Alamishik (I, KKS, III, V+VI+VII); 8 - Boston (III); 9, 10 - Andijan (III subthrust and eastern field); 11 - Chongara-Galcha (IV); 12 - Severny Sokh (VIII); 13-Changyrtash (III); 14-Izbaskent (IX); 15-Nefteabad (II); 16-Kim (VII).***



ISSN 3030-3907

**Sequence of Commissioning Injection Wells**

Analysis of the $\eta=f(P_{curr}/P_{sat})$ dependence shown in Fig. 1 shows that initiating waterflooding after the value of $P_{curr}/P_{sat}$ exceeds 0.6 - 0.8 leads to a certain loss of oil recovery. During the development process in layers with significant zonal and thickness heterogeneity, the rates of reservoir pressure decline vary across different sections. Therefore, by the time waterflooding commences, the bottomhole pressure in wells located in different reservoir sections can be either higher or lower than the optimal value $(P_{curr}/P_{sat})_{opt.}$ In reservoir zones where the pressure is less than $(P_{curr}/P_{sat})_{opt,}$ there is a risk of losing some amount of oil. This adverse effect can be mitigated by strategically sequencing the commissioning of injection wells [8, 9].

**Where:**

$P_{curr}$ - Current pressure

$P_{sat}$ - Saturation pressure

$_{opt}$ - Optimal

The forecast of zones with $P_{curr}/P_{sat} \approx (P_{curr}/P_{sat})_{opt}$ can be performed in the following sequence:

1. **Initial Reservoir Pressure Determination:** At the initial stage of development, the initial reservoir pressure (Pres.init) is determined for each well.
2. **Pressure Decline Analysis:** Based on the fluid withdrawal rates from the wells, as specified by the process regime, the time it takes for the current reservoir pressure to decline to the $(P_{curr}/P_{sat})_{opt}$ values is determined. This analysis provides the dynamics of the well stock, identifying wells with bottomhole pressure values $\leq (P_{curr}/P_{sat})_{opt}$. This dynamic behavior serves as the basis for converting production wells into injection wells and initiating water injection.

Utilizing the proposed sequence for commissioning injection wells allows for:

1. **Optimized Waterflooding:** Establishing a sequence for activating waterflooding centers based on the depletion of natural reservoir energy in different zones.
2. **Continued Natural Production:** Continuing the operation of a portion of the well stock in natural production mode in zones where $P_{curr}/P_{sat} > (P_{curr}/P_{sat})_{opt}$. [8, 9, 10, 14]

**Regulation and intensification of development.** The entry of many fields, including large ones, into the late stage requires increased attention to the regulation of development - one of the most important ways to increase the efficiency of the systems used.

In the process of developing a number of fields, the designed systems were radically changed. Sometimes this was done due to the need to increase production



ISSN 3030-3907

rates against those previously envisaged. Often, such measures were taken because the adopted system did not ensure the achievement of the design level of production.

**Ways to improve the efficiency of developing multilayer objects.** With the use of waterflooding, the allocation of objects of high capacity, often combining layers with significantly different characteristics, is widely practiced.

In this regard, many proposals have been made and are being implemented to improve the operation of multilayer objects. Thus, the admissibility of accelerated production of more productive layers, if they lie below others, is substantiated. The separate injection of water into layers with different permeability through independent injection wells with the simultaneous opening of all layers in production wells, which is used at many fields, has fully justified itself. Several methods of selective isolation of layers have been developed - oil workers have done a lot in this direction. The method of simultaneous-separate operation of layers is being introduced. [11]

All these methods should be widely used in the development of multilayer objects, however, these tools are often used insufficiently thought out and not at a high technical level.

There are still a lot of shortcomings in the application of the simultaneous-separate operation method. The tasks solved by this method are not clearly defined, rational ways to solve them have not been found.

**On improving the displacement properties of injected water.** The conducted theoretical research and pilot-industrial work have to a certain extent prepared the entry of waterflooding into a new period of development, into a period of increasing its efficiency through the use of physicochemical methods. Work is underway to test in field conditions methods of adding surfactants, carbon dioxide, sulfuric acid, thickeners to the injected water, as well as injecting hot water.

The tests carried out allow us to count on the fact that the use of surfactants in different conditions will increase oil recovery by about 5-10% [12, 13].

The main task of enterprises and institutions is to carry out all this work accurately, competently and obtain all the necessary data on the effectiveness of the processes. Physicochemical methods in combination with waterflooding belong to the future. The wide scale of waterflooding ensures their wide application on the basis of already created field systems.

In the reports provided for in the program of the meeting, including this report, based on the experience of development, a principled approach to solving a number of basic technological provisions of waterflooding methods has been defined. This should help to ensure that the development systems recommended by



ISSN 3030-3907

design organizations meet the requirements of the national economy as much as possible from the very beginning of the commissioning of new fields and are justified in a differentiated manner, taking into account their geological and physical conditions. It has not yet been possible to achieve this. The projects submitted in recent years do not yet sufficiently meet these requirements. In some areas, preference is given to any one waterflooding system, and it is believed that it is quite effective in almost all geological and physical conditions.

There are cases when, for deposits with identical geological and physical conditions, systems that are significantly different from each other are adopted, and vice versa, for deposits with sharply different characteristics, systems that are close in intensity.

These are just some examples, but they also speak of serious shortcomings and the need to develop a common approach, common criteria for justifying development systems.

Research and design institutes need to accelerate the restructuring of design work on the development of oil fields, make the most of the advantages of integrated design and provide justification for development systems that are most appropriate from a national economic point of view.

**CONCLUSIONS**

1. Waterflooding of oil reservoirs will remain the main method of developing oil fields in our country for a long time. In almost all geological conditions, waterflooding ensures a significant national economic effect.

2. When choosing a waterflooding system and its main elements, the determining geological and physical factors are the size of the reservoirs, the ratio of the viscosity of oil and water in reservoir conditions, and the nature of the reservoirs.

3. The implemented development systems should ensure the highest possible coverage of the production facility with waterflooding - in terms of area and capacity.

4. When developing oil fields, in order to increase the efficiency of the adopted waterflooding systems, it is necessary to widely and systematically implement measures to regulate the process in order to increase the coverage of the reservoirs with impact and ensure the most favorable economic indicators of development.

5. The optimal ratio of Ртек.з/Рнас, at which it is advisable to start waterflooding, which ensures the greatest final oil recovery for the Fergana fields, is in the range of 60-80%. The established fact of the significant influence of the Ртек.з/Рнас parameter on the final oil recovery should be taken into account when



ISSN 3030-3907

designing energy-saving systems for the development of oil reservoirs with waterflooding. This will allow more rational use of the natural reservoir energy of the reservoir, reduce the consumption of injected water and electrical energy, and, consequently, the cost of produced oil.

6. Significant prospects for increasing the efficiency of waterflooding are associated with the introduction of cyclic methods and changing the direction of fluid flows in the reservoirs, as well as with the use of physicochemical methods to improve the properties of injected water. Along with this, it is necessary to intensify research on the search for fundamentally new additives to water and other ways to increase the efficiency of waterflooding.

7. Research institutes need to take measures to intensify research on the development of deposits of high-viscosity and high-paraffin oils, oil and gas deposits, on the development of principles for regulating development, on improving the development of deposits at a late stage, methods for justifying design oil recovery, and on solving economic problems of developing oil fields.

## REFERENCES

1. Агзамов А.Х. Влияние некоторых физико-геологических факторов на эффективность заводнения на примере месторождения Южный Аламышик // РНТС Сер. Нефтепромысловое дело и транспорт нефти, 1985. -№12. -С.8-10.
2. Агзамов А.Х. Применение циклического заводнения в условиях месторождений Ферганской нефтегазоносной области // Тр.СредазНИПИнефть. -М.: ВНИИОЭНГ, 1988. -С. 22-27.
3. Агзамов А.Х. Сравнительная оценка эффективности систем разработки карбонатных коллекторов на примере месторождений Ферганской нефтегазоносной области // Геология, геофизика и разработка нефтяных месторождений, 1988. -№2. -С. 18-20.
4. Агзамов А.Х., Ирматов Э.К. Использование метода главных компонент для оценки влияния геолого-промысловых факторов на показатели системы разработки залежей нефти // ЭИ Сер. Техника и технология добычи нефти. -М.: ВНИИОЭНГ, 1990. -№8. -С.3-8.
5. Ирматов Э.К., Агзамов А.Х. Обз.сер. Опыт и проблемы совершенствования разработки нефтяных и нефтегазовых месторождений Средней Азии и методы повышения их нефтеотдачи: Заводнение нефтяных месторождений с осложненными горно-геологическими условиями и пути повышения его эффективности. -Ташкент. -ФАН, 1991.-71 с.
6. Ирматов Э.К., Агзамов А.Х. Заводнение нефтяных месторождений с осложненными горно-геологическими условиями и пути повышения его



ISSN 3030-3907

эффективности. - Ташкент: Изд. АН РУз., 1992. - 60 с.
7. Назаров С.Н. Результаты анализа разработки на примере месторождений Ферганы. // Нефтяное хозяйство, 1965. -№ 2. -С.31-38.
8. Посевич А.Г., Агзамов А.Х., Эрматов Н.Х. Оценка влияния некоторых геолого-физических и технологических факторов на эффективность заводнения месторождений Ферганы // Узбекский журнал нефти и газа, 1998. -№3. -С. 23-25.
9. Эрматов Н.Х., Мухаммедов Г.Р., Эшонкулов Ж.З., Хошимов Э.А. Анализ результатов экспериментальных исследований влияния снижения забойного давления насыщения нефти газом на продуктивность скважин // «Геологик-қидирув ишларининг замонавий муаммолари ва ривожлантириш истиқболлари» Республика илмий-амалий анжумани материаллари тўплами.–Қарши, 2002. –С.287-290.
10. Эрматов Н.Х., Каршиев А.Х., Бобомуродов У.З. Оценка эффективности заводнения на месторождениях Сурхандарьинской нефтегазоносной области Узбекистана // «Фундаментальные и прикладные проблемы науки». Материалы XIII Международного симпозиума. –Москва, 2018. –С.185-193.
11. Азимов П.К. Разработка нефтяных месторождений с применением заводнения. - Ташкент: Фан, 1978. - 240 с.
12. Ибрагимов М.Р. Технология и техника добычи нефти. - Москва: Недра, 1983. - 320 с.
13. Чарушников В.Н. Эксплуатация нефтяных месторождений. - Москва: Недра, 1988. - 384 с.
14. Сипачев Н.В. Разработка нефтяных месторождений на поздней стадии. - Москва: Недра, 2002. - 288 с.



ISSN 3030-3907